

RIFLETTORI INDUSTRIALI E  
SOSPENSIONI DECORATIVE

Industrial Hi bays &  
decorative suspensions



# CHARM 2



## ☆ CHARM 2 · 2LED

m<sup>2</sup> 0,024  
260x255x360mm

1 Pcs  
30 pcs



IP20



IK 07



CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	PORTALAMPADA Lampholder	ESECUZIONE Execution	FLUSSO NOM. Typical Flux(lm)	COLORE LED Beam color(K)	APERTURA FASCIO Beam angle(α)	CORRENTE Current(A)	PESO NETTO Net weight(Kg)	SORGENTE Light source	COLORENEC Colour
320003.102	NC		E27	NC					4,29		□
318943.000	ALO	75/100W	G53	CN					4,29		□
318943.175	ALO	75W	G53	CNL					4,34	☉	□
318943.110	ALO	100W	G53	CNL					4,34	☉	□
318713.118	FLC	18W	D 6x24d2	CN					4,29		□
318713.126	FLC	26W	D 6x24d3	CN					4,84		□
318823.132	FLC	32W	D 6x24q3	EL					4,09		□
318643.133	LED	33,8W			3600	3000	24°	1,00	4,11	Osram ☉	□
318643.134	LED	33,8W			3600	4000	24°	1,00	4,11	Osram ☉	□
318643.135	LED	33,8W			3600	3000	40°	1,00	4,11	Osram ☉	□
318643.136	LED	33,8W			3600	4000	40°	1,00	4,11	Osram ☉	□

**Corpo:** stampato in pressofusione di alluminio.  
**Verniciatura:** polvere di poliestere con finitura satinata.  
**Vetro di protezione:** temperato spessore 6 mm.  
**Modulo POWER LED:** 33,8W, 3600lm, 3000/4000K.  
**Alimentazione:** 230V 50Hz.  
**Kit di sospensione:** basetta di fissaggio a soffitto, blocca cavi di sicurezza, quattro cavi in acciaio L = 1,75 m regolabili, cavo di alimentazione.

**Disponibile a richiesta:**  
· Modulo 22W 1800lm 220/240V α40°

**Housing:** die-cast aluminium.  
**Paintwork:** thermosetting polyester powder satin finished.  
**Protection glass:** 6 mm thickness tempered.  
**POWER LED module:** 33,8W, 3600lm, 3000/4000K.  
**Power supply:** 230V 50Hz.  
**Suspension kit:** ceiling mounting base, security cables, four steel cables L = 1,75 m for adjustable installation height, power supply cable.

**Available on request:**  
· 22W 1800lm 220/240V α40° LED module

### COLORI DISPONIBILI Available colours

- 1 Bianco  
White
- 2 Nero RAL 9005  
RAL 9005 Black
- Antracite RAL 7039 + Argento RAL 9006  
RAL 7039 Anthracite + RAL 9006 Silver

Sostituire la VI<sup>a</sup> cifra del codice del prodotto per cambiare colore.  
Replace the 6th figure of the product code to change colour.



Charm 2



Charm 2LED

Simbologia Simbology.....pag. 12





Dettaglio  
basetta di  
fissaggio a  
soffitto

Ceiling mounting  
base detail




Sistema di  
sospensione:  
4 tiranti in acciaio

Suspension  
system:  
4 steel cables

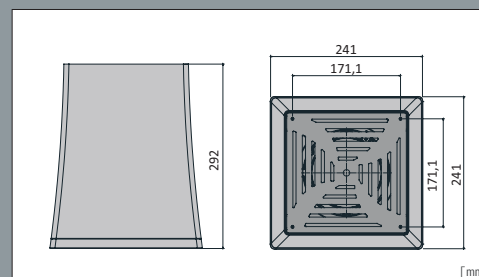

CHARM 2 FLC 1x26W D G24d3



CHARM 2 LED 1x33,8W 1A