



# REVERSE LED

## REVERSE LED

m<sup>2</sup> 0,027  
375x300x235mm

1 Pcs  
40 pcs

IP65 IK 07 CE

0,062 m<sup>2</sup> monolampada

0,098 m<sup>2</sup> bilampada

CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOM. Typical Flux(lm)	COLORE Beam colour(K)	APERTURA FASCIO Beam angle(α)	CORRENTE Current(A)	PESO NETTO Net weight(Kg)	SORGENTE Light source	COLORE COLORE Colour
804643.133	LED	1x33,8W	3600	3000	24°	1,00	4,97	Osram	☐
804643.134	LED	1x33,8W	3600	4000	24°	1,00	4,97	Osram	☐
804643.135	LED	1x33,8W	3600	3000	40°	1,00	4,97	Osram	☐
804643.136	LED	1x33,8W	3600	4000	40°	1,00	4,97	Osram	☐
804643.233	LED	2x33,8W	7200	3000	24°	1,00	6,69	Osram	☐
804643.234	LED	2x33,8W	7200	4000	24°	1,00	6,69	Osram	☐
804643.235	LED	2x33,8W	7200	3000	40°	1,00	6,69	Osram	☐
804643.236	LED	2x33,8W	7200	4000	40°	1,00	6,69	Osram	☐
804643.120	LED	1x22W	1800	3000	40°		4,67	Osram	☐
804643.121	LED	1x22W	1800	4000	40°		4,67	Osram	☐
804643.220	LED	2x22W	3600	3000	40°		6,69	Osram	☐
804643.221	LED	2x22W	3600	4000	40°		6,69	Osram	☐



Reverse 1X

**Piastra di fissaggio a parete, corpo e cornici:** pressofusione di alluminio.

**Verniciatura:** polvere di poliestere termoindurente.

**Moduli POWER LED:** 33,8W 1,00A, 3600lm, apertura fascio 24° o 40°, 3000/4000K; 22W, 1800lm, 3000/4000K, apertura fascio 40°.

**Vetro di protezione:** temperato spessore 6 mm.

**Alimentazione:** elettronica 220/240V 50/60Hz.

Sulla versione bilampada, accensione indipendente delle due sorgenti fornita di serie.

**Disponibile a richiesta:**

- combinazioni tra potenze e tipologie di lampade differenti;
- adattatore palo 40/60 mm doppio o singolo.



Reverse 2X

**Wall mounting plate, housing and frame:** die-cast aluminium.

**Paintwork:** thermosetting polyester powder.

**POWER LED modules:** 33,8W 1,00A 3600lm, beam angle 24° o 40°, 3000/4000K; 22W, 1800lm, 3000/4000K, beam angle 40°.

**Protection glass:** 6 mm tempered.

**Electronic ballast supply:** 220/240V 50/60Hz.

On bilamp version, independent switching for each light source is a standard option.


**Available on request:**

- combination between different powers and type of lamps;
- mono or double pole adapter 40/60 mm.


### COLORI DISPONIBILI

Available colours


- Antracite RAL 7039 + Argento RAL 9006
- RAL 7039 Anthracite + RAL 9006 Silver

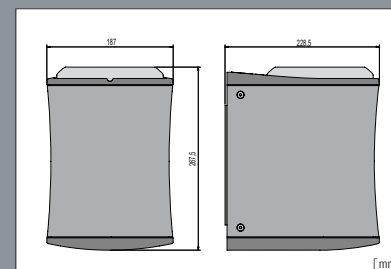

REVERSE 1X

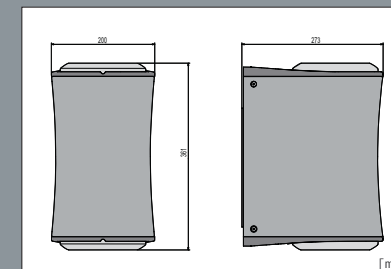

REVERSE 2X



REVERSE 1X 1x33,8W 1A



LED 1x33,8W 1A



## REVERSE Accessori e fissaggio a palo

### Accessories & pole mounting



Supporto palo per  
applicazione singola  
(solo per Reverse 1X)

*Pole support for  
single fitting  
(only for Reverse 1X)*

cod. 980000.140 (Ø 40 mm)  
cod. 980000.160 (Ø 60 mm)



Supporto palo per  
applicazione doppia  
(solo per Reverse 1X)

*Pole support for  
double application  
(only for Reverse 1X)*

cod. 980000.240 (Ø 40 mm)  
cod. 980000.260 (Ø 60 mm)

